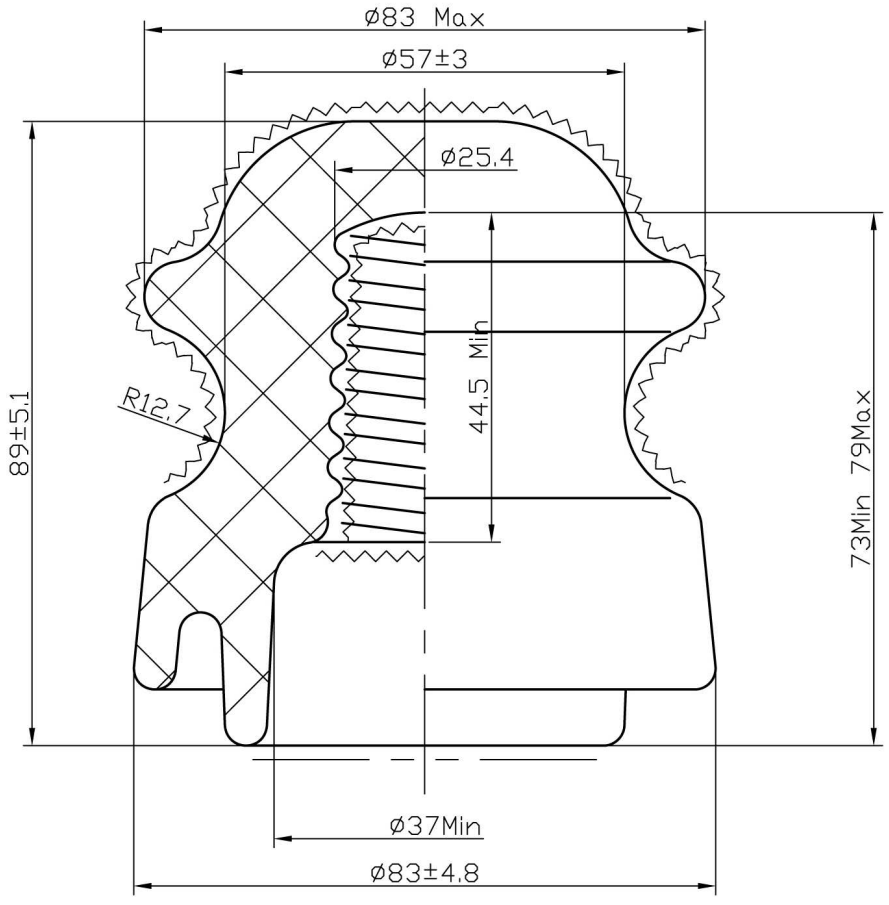

TECHNICAL DATA

Type	ANSI 55-1
Standard Applied	ANSI C29.5
Main Dimensions	
D:	83mm
H:	90mm
Creepage Distance	102mm
Dry arcing distance	57mm
Cantilever Strength Load	13kN
Low Frequency Dry Flashover Voltage	35kV
Low Frequency Wet Flashover Voltage	20kV
Impulse Flashover (positive)	50kV
(negative)	70kV
Power-Frequency Puncture Voltage	50kV
Radio-Influence Voltage	
Test Voltage to Ground	5kV
Maximum RIV, at 1000kHz	50μV

****** MATERIAL: PORCELAIN

Vanguard ELECTRIC	Pin Insulator	Reference	55-1
		VE No.	5501SG1
		Rev	0
Weight	Page 1 of 1	Vanguard Electric,LLC	