

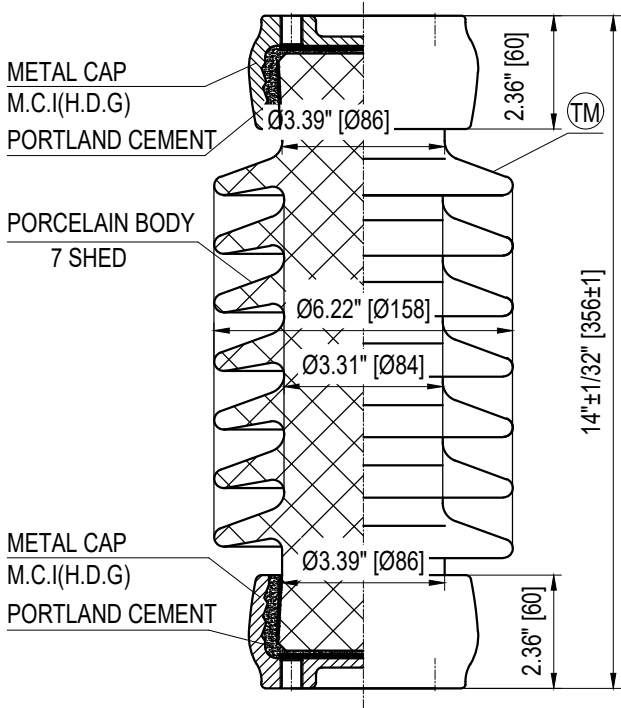



TOP INSTALLATION HOLES

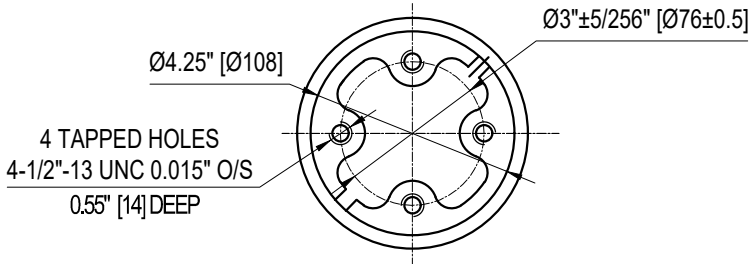

BOTTOM INSTALLATION HOLES

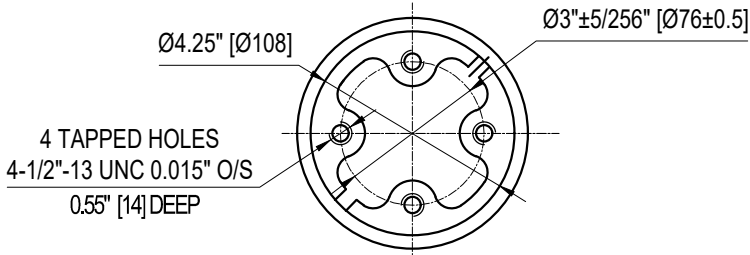

ELECTRICAL PROPERTIES


Critical Impulse Flashover Voltage	
Pos.:	170 kV
Neg.:	250 kV
Low Frequency Withstand Voltage	
Wet:	60 kV
Dry:	70 kV
Impulse Withstand Voltage:	150 kV
Radio Influence Voltage Data:	
Test Voltage to Ground:	15 kV
Maximum RIV at 1000kHz:	100 µV

PHYSICAL PROPERTIES

Creepage Distance:	24 in (610 mm)
Net weight:	27.5 lbs (12.5Kg)
Color:	-

MECHANICAL PROPERTIES

Cantilever Strength:	2000 lbs (8.9 kN)
Tension Strength:	10000 lbs (45 kN)
Torsion Strength:	8000 in-lbs (900 N·m)
Compression Strength:	10000 lbs (45 kN)
According to Standard Specification:	ANSI C 29.9 or CSA C156.1M, CSA156.3 except drawing
Galvanized parts as per ASTM 123	

<p>POST TYPE INSULATOR REFERENCE: TR208 VTR208SSG0</p>	 <p>Vanguard Electric (R) www.vanguardelec.com sales@vanguardelec.com</p>
<p>DRAWING: TR208 VTR208SSG0 RV1</p>	