


TOP INSTALLATION HOLES

$\varnothing 5" \pm 5/256"$ BCD [$\varnothing 127 \pm 0.5$]

4 TAPPED HOLES
5/8"-11 UNC 0.015" O/S
0.787" [20] DEEP

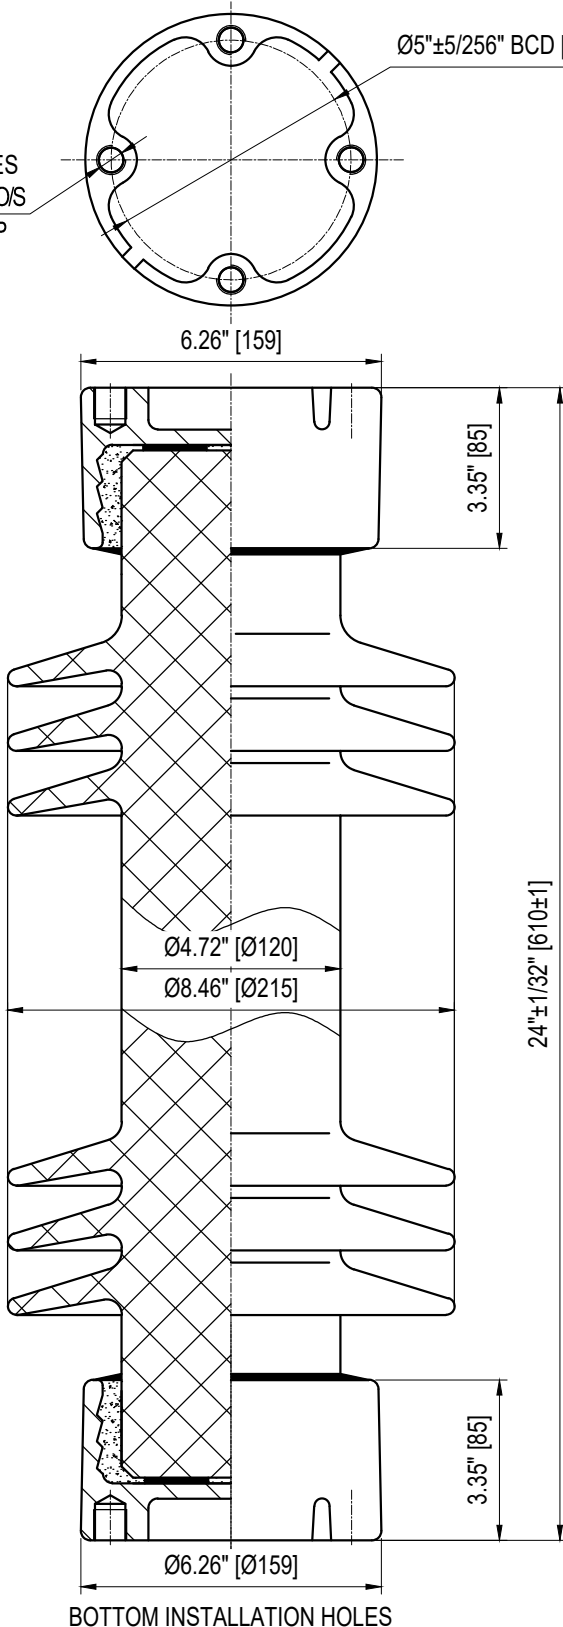

BOTTOM INSTALLATION HOLES

$\varnothing 5" \pm 5/256"$ BCD [$\varnothing 127 \pm 0.5$]

4 TAPPED HOLES
5/8"-11 UNC 0.015" O/S
0.787" [20] DEEP

ELECTRICAL PROPERTIES

Critical Impulse Flashover Voltage	
Pos.:	280 kV
Low Frequency Withstand Voltage	
Wet:	100 kV
Impulse Withstand Voltage:	250 kV
Radio Influence Voltage Data:	
Test Voltage to Ground:	30 kV
Maximum RIV at 1000kHz:	200 μ V

PHYSICAL PROPERTIES

Creepage Distance:	43 in (1092 mm)
Net weight:	70.4 lbs (32 Kg)
Color:	Grey

MECHANICAL PROPERTIES

Cantilever Strength:	4000 lbs (17.8 kN)
Tension Strength:	25000 lbs (111.2 kN)
Torsion Strength:	20000 in-lbs (2.26 kN·m)
Compression Strength:	60000 lbs (267 kN)

According to Standard Specification: ANSI C 29.9

Galvanized parts as per ASTM 123

POST TYPE INSULATOR
REFERENCE: TR267
VTR267SSG1

DRAWING: TR267 VTR267SSG1 RV1



Vanguard Electric (R)
www.vanguardelec.com
sales@vanguardelec.com