

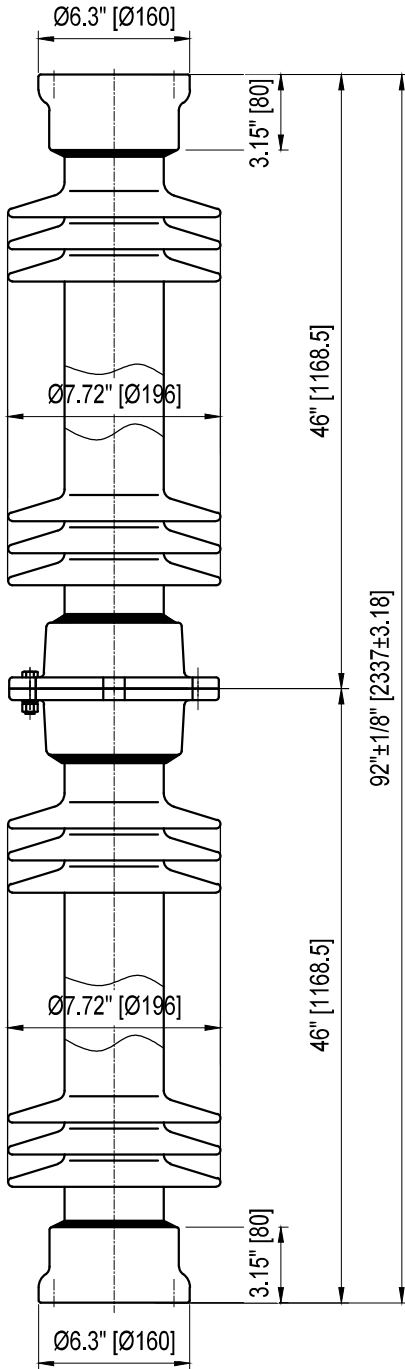


TOP INSTALLATION HOLES

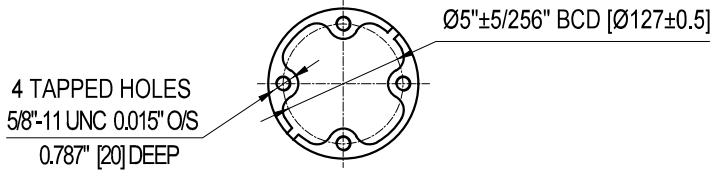

BOTTOM INSTALLATION HOLES

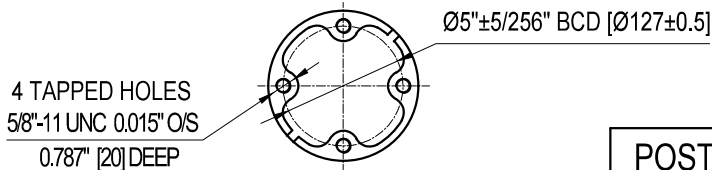

Semi-Conductive Glazed

ELECTRICAL PROPERTIES	
Critical Impulse Flashover Voltage	
Pos.:	1210 kV
Low Frequency Withstand Voltage	
Wet:	455 kV
Impulse Withstand Voltage:	1050 kV
Radio Influence Voltage Data:	
Test Voltage to Ground:	146 kV
Maximum RIV at 1000kHz:	500 µV
PHYSICAL PROPERTIES	
Creepage Distance:	198 in (5029 mm)
Net weight:	226.6 lbs (103 Kg)
Color:	Grey
MECHANICAL PROPERTIES	
Cantilever Strength:	800 lbs (3.6 kN)
Tension Strength:	20000 lbs (89 kN)
Torsion Strength:	40000 in-lbs (4.52 kN·m)
Compression Strength:	60000 lbs (267 kN)
According to Standard Specification:	ANSI C 29.9
Galvanized parts as per ASTM 123	

POST TYPE INSULATOR
 REFERENCE: TR312
 VTR312SSG1-SCG
 DRAWING: TR312 VTR312SSG1-SCG RV0



Vanguard Electric (R)
 www.vanguardelec.com
 sales@vanguardelec.com