

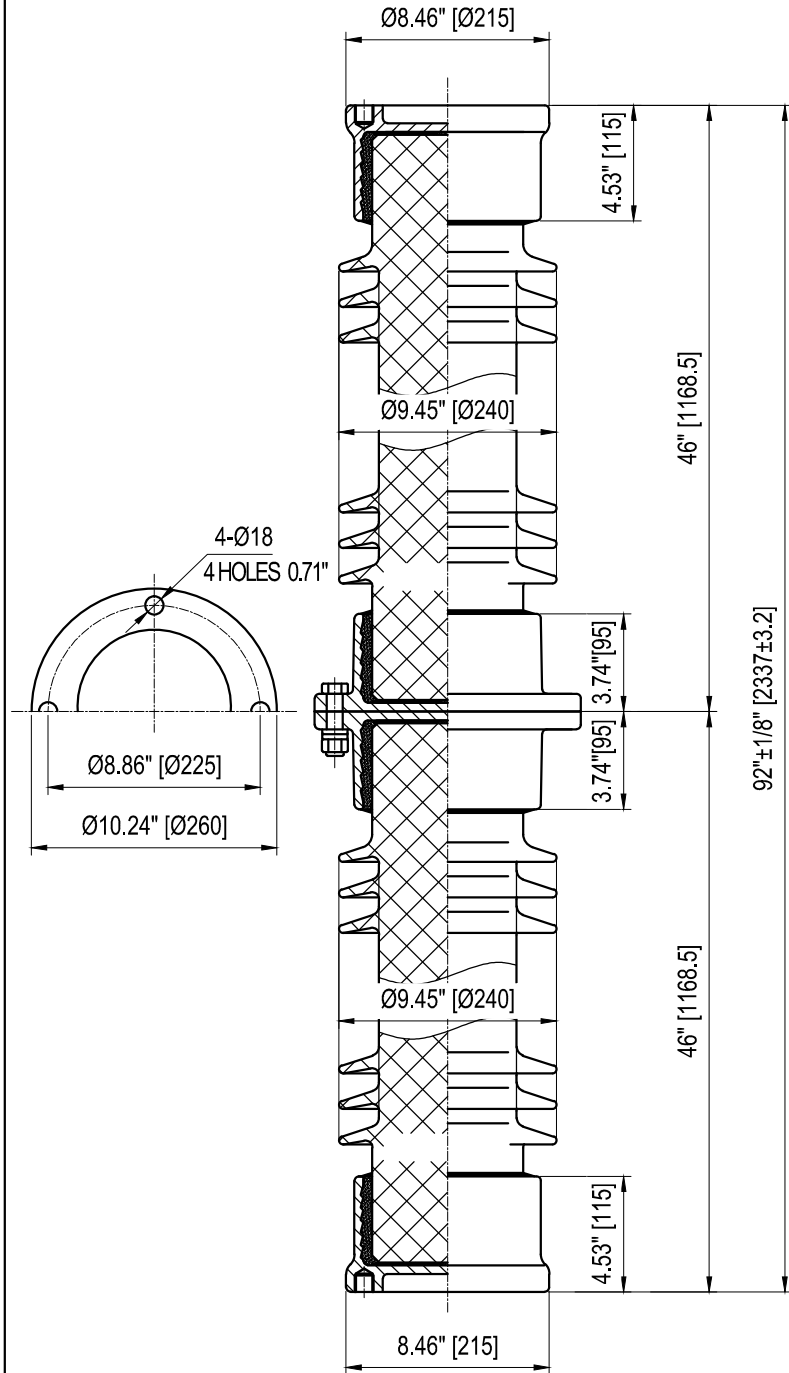


TOP INSTALLATION HOLES

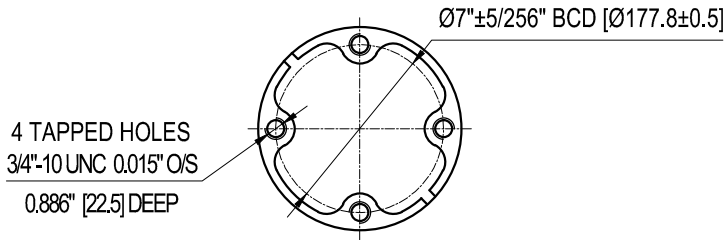

BOTTOM INSTALLATION HOLES

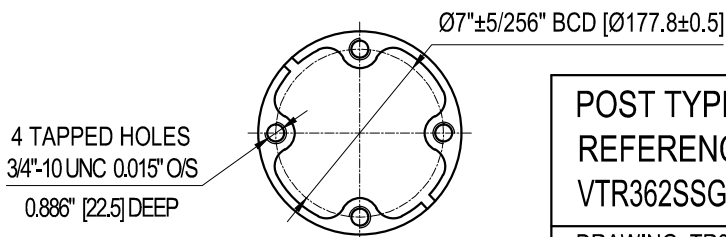

Semi-Conductive Glazed

ELECTRICAL PROPERTIES	
Critical Impulse Flashover Voltage	
Pos.:	1210 kV
Low Frequency Withstand Voltage	
Wet:	455 kV
Impulse Withstand Voltage:	1050 kV
Radio Influence Voltage Data:	
Test Voltage to Ground:	146 kV
Maximum RIV at 1000kHz:	500 μ V
PHYSICAL PROPERTIES	
Creepage Distance:	198 in (5029 mm)
Net weight:	-
Color:	Light Grey
MECHANICAL PROPERTIES	
Cantilever Strength:	2300 lbs (10.23 kN)
Tension Strength:	40000 lbs (178 kN)
Torsion Strength:	120000 in-lbs (13.56 kN·m)
Compression Strength:	100000 lbs (445 kN)
According to Standard Specification:	ANSI C 29.9
Galvanized parts as per ASTM 123	

POST TYPE INSULATOR
REFERENCE: TR362
VTR362SSG1-SCG
 DRAWING: TR362 VTR362SSG1-SCG RV0



Vanguard Electric (R)
www.vanguardelec.com
sales@vanguardelec.com