

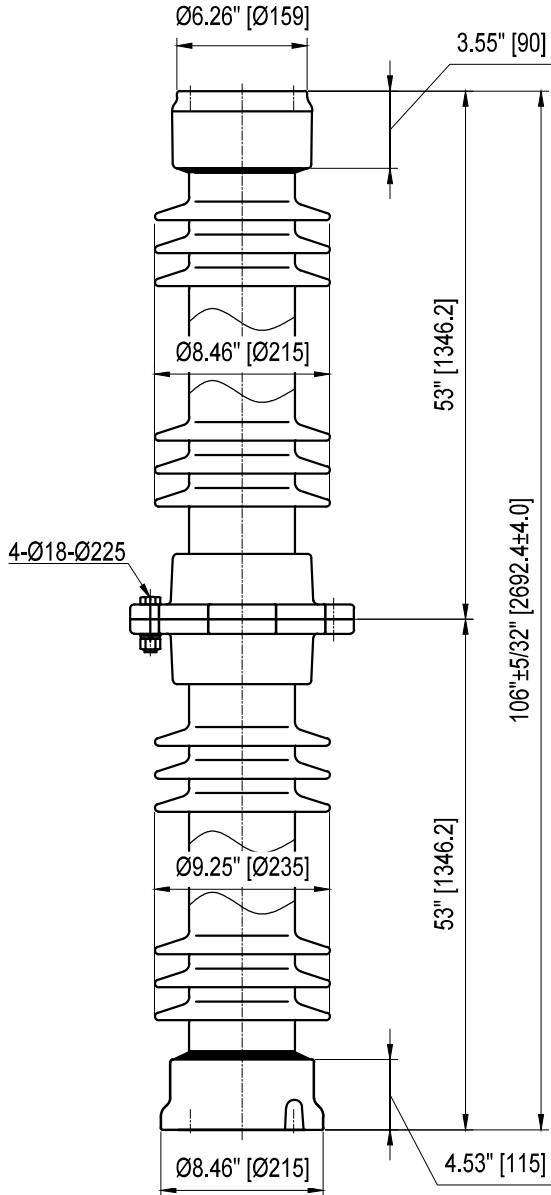


TOP INSTALLATION HOLES

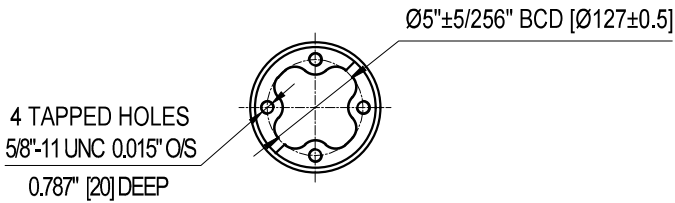

BOTTOM INSTALLATION HOLES

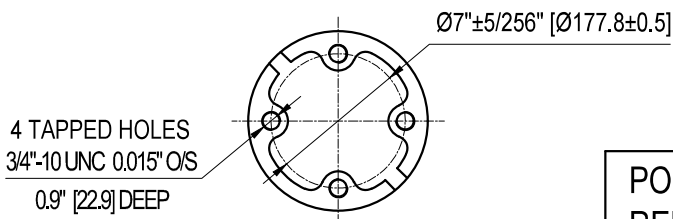

Semi-Conductive Glazed

ELECTRICAL PROPERTIES

Critical Impulse Flashover Voltage	
Pos.:	1410 kV
Low Frequency Withstand Voltage	
Wet:	525 kV
Impulse Withstand Voltage:	1300 kV
Radio Influence Voltage Data:	
Test Voltage to Ground:	220 kV
Maximum RIV at 1000kHz:	1000 μ V

PHYSICAL PROPERTIES

Creepage Distance:	231 in (5868 mm)
Net weight:	411.4 lbs (187 Kg)
Color:	Grey

MECHANICAL PROPERTIES

Cantilever Strength:	2050 lbs (9.1 kN)
Tension Strength:	20000 lbs (88.9 kN)
Torsion Strength:	40000 in-lbs (4.52 kN·m)
Compression Strength:	60000 lbs (266.7 kN)

According to Standard Specification: ANSI C 29.9

Galvanized parts as per ASTM 123

POST TYPE INSULATOR
REFERENCE: TR369
VTR369SSG1-SCG

DRAWING: TR369 VTR369SSG1-SCG RV0



Vanguard Electric (R)
www.vanguardelec.com
sales@vanguardelec.com