


TECHNICAL DRAWING

| Nº | DESCRIPTION | REVISED | DATE |
|----|-------------|---------|------|
| | | | |

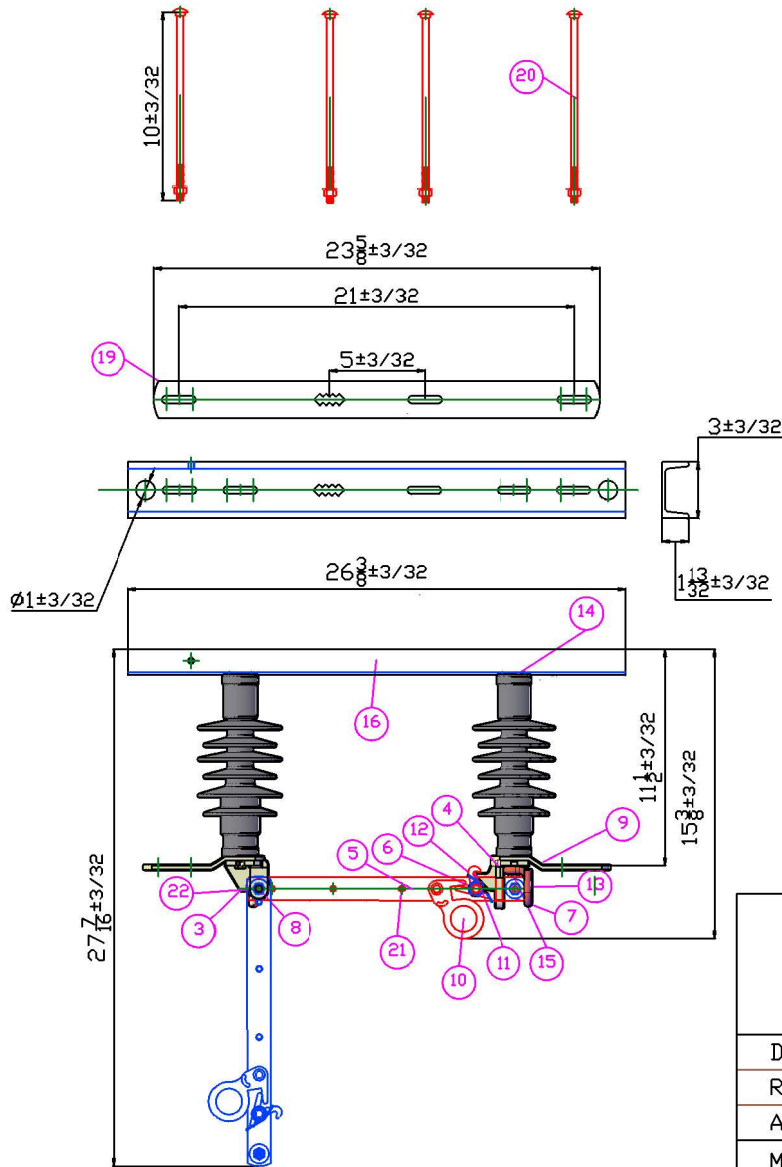

NOTE : * Units in inches

| 22 | 4 | Washer 3/8" | Stainless steel |
|------|-----|------------------------------|----------------------------|
| 21 | 3 | Spike separator 1 3/8" | Round brass 5/16" |
| 20 | 4 | Screw back plate | galv screw 3/8X10 |
| 19 | 1 | Back plate | Hr 2x3/8 Galv |
| 18 | 8 | Washer 5/16" | Stainless steel |
| 17 | 8 | Washer 5/16" | Stainless steel |
| 16 | 1 | Nameplate | Aluminum 56X41 mm |
| 15 | 2 | Hexagonal Screw 5/16" x 1" | Stainless steel |
| 14 | 7 | Hexagonal screw 5/16" x 3/4" | Stainless steel |
| 13 | 1 | Hook SE | |
| 12 | 1 | Torsion spring | Stainless steel |
| 11 | 1 | Hitch | cu alloy |
| 10 | 1 | Hookstick | Cu alloy |
| 9 | 2 | Contact Sn | Cu electrolytic 1 1/4X3/16 |
| 8 | 3 | Lock nut 3/8" | Stainless steel |
| 7 | 12 | Conical washer | Stainless steel |
| 6 | 3 | Screw 3/8X2 1/2" | Stainless steel 304 |
| 5 | 2 | Blade | Cu 1 1/4" x 3/16" plating |
| 4 | 1 | Contact input | Cu alloy w/silver plating |
| 3 | 1 | Contact output | Cu alloy w/silver plating |
| 2 | 2 | Insulator | Polymer insulator |
| 1 | 1 | Base | Galvanized plate HR |
| ITEM | QTY | DESCRIPTION | SPECIFICATION |



PBL2 DISTRIBUTION HOOKSTICKS
600 A
POLYMER INSULATOR

| | | |
|------------|----------|-----------|
| DRAWING : | J. G. C. | 19-OCT-20 |
| REVISED : | J. C. .C | 19-OCT-20 |
| APPROVED : | J. G. C. | 19-OCT-20 |

PBL2-27600-10
PBL2 27 kV 125 kV BIL 600 AMP
POLYMER INSULATOR

| | | | |
|----------|----------------------|---------------|-------------------------------|
| Material | As per specification | Scale: S/E | Drawing Nº : PBL2-27600-10 |
|----------|----------------------|---------------|-------------------------------|