


mm [inches]

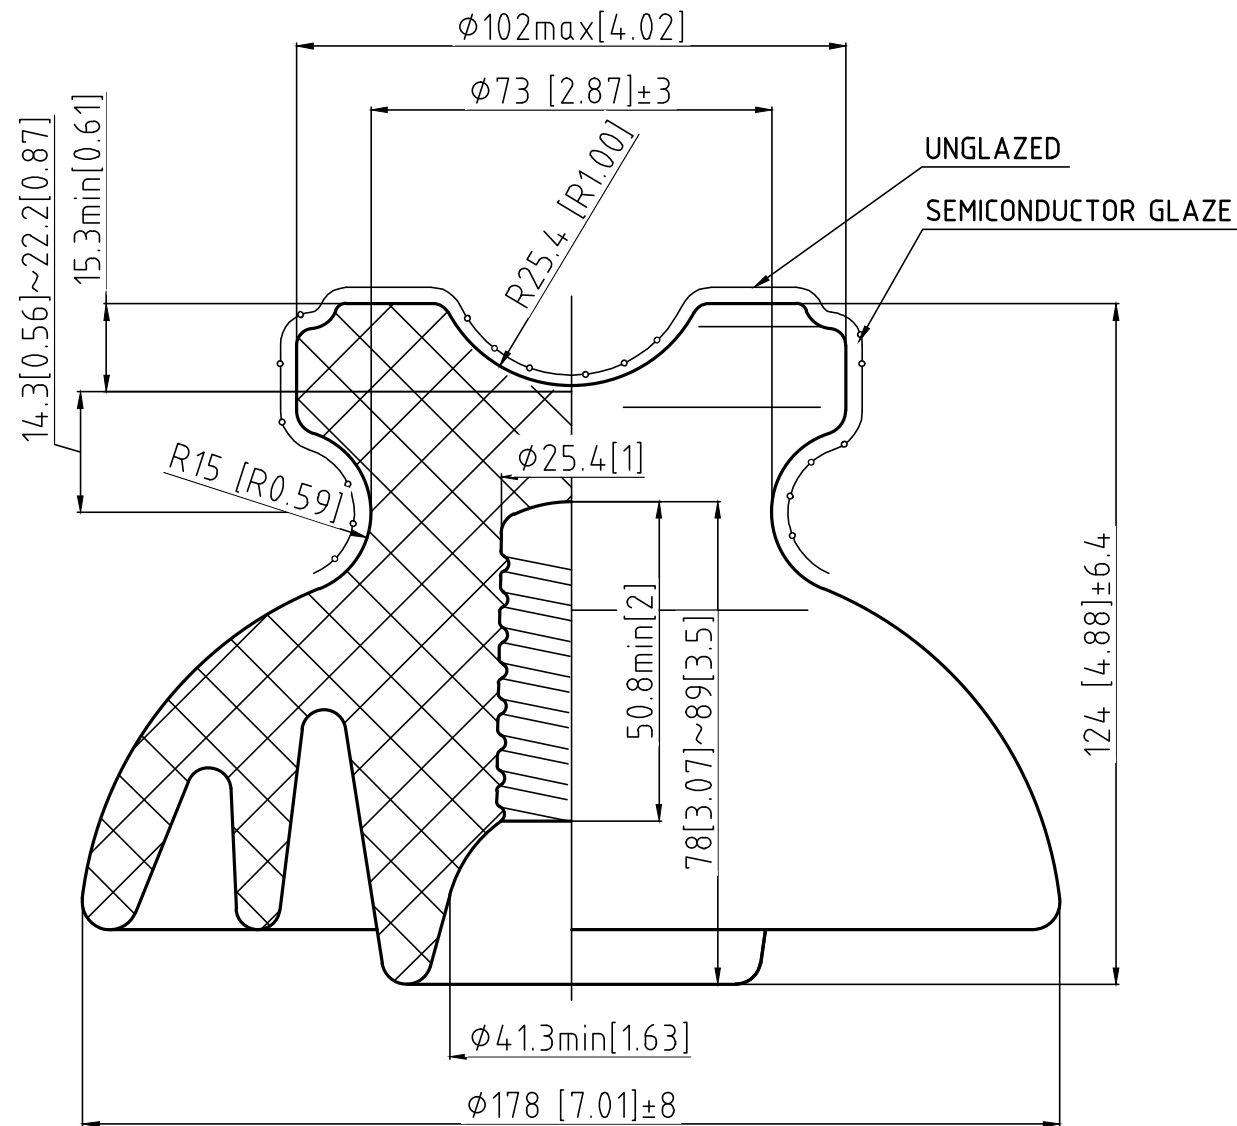

TECHNICAL DATA

Specification Applied: ANSI C29.5

1. Dimensions

- a. Leakage distance,mm 304(12")
- b. Dry arcing distance,mm 159(6-1/4")

2. Mechanical values

- a. Cantilever strength,kN 13(3000lbs)


3. Electrical values

- a. Low-frequency flashover voltage(dry/ wet ),kV 80/45
- b. Critical impulse flashover voltage(pos/neg),kV 130/150
- c. Power-frequency puncture voltage ,kV 115

4. Radio-Influence Voltage

- a. Test voltage to ground ,kV 15
- b. Maximum RIV, at 1000kHz ,  $\mu V$  100

5.Colour:Grey

	Pin Insulator	Reference	55-5
		VE No.	55-1 SG1
		Rev	0
Weight	6.4 lbs	Vanguard Electric,LLC	
Page 1 of 1			