



mm [inches]

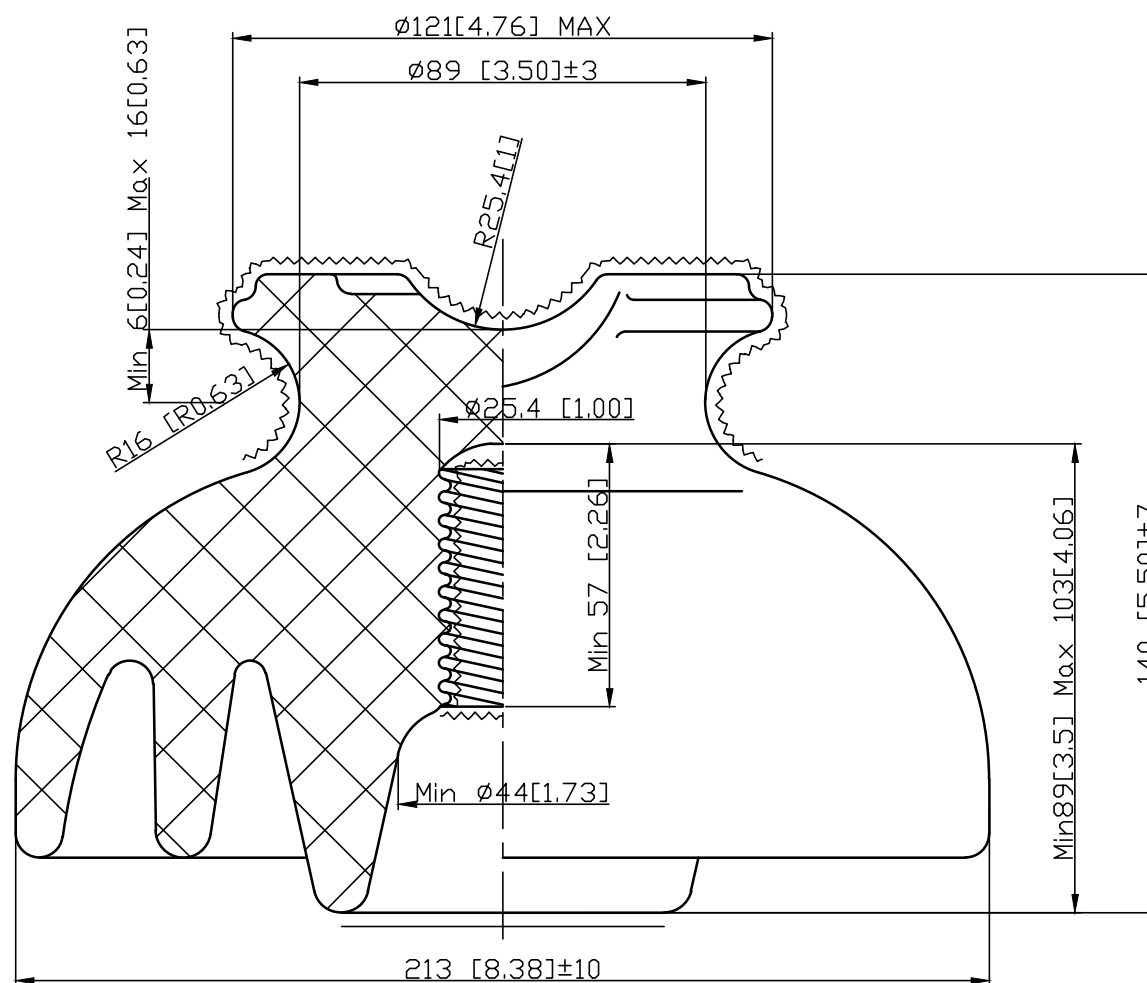

TECHNICAL DATA

Type	ANSI 55-6
Standard Applied	ANSI C29.5
Creepage Distance	381mm (15")
Dry arcing distance	203mm (8")
Cantilever Strength Load	13kN (3000lbs)
Low Frequency Dry Flashover Voltage	100kV
Low Frequency Wet Flashover Voltage	50kV
Critical Impulse Flashover(positive)	150kV
(negative)	170kV
Power-Frequency Puncture Voltage	135kV
Radio-Influence Voltage	
Test Voltage to Ground	22kV
Maximum RIV, at 1000kHz	100 μ V
Color: Grey	

\*\*\*\*\* MATERIAL: PORCELAIN

	Pin Insulator	Reference	55-6
		VE No.	55-6 SG1
		Rev	0
Weight	Page 1 of 1	Vanguard Electric, LLC	